


◎ 适用于直径 19 毫米以下线缆 Suitable for 19mm or less of cable.

主要技术参数 Basic technical data

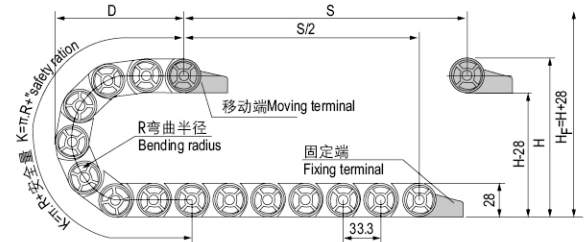

节距=33.3mm, 每米节数=30, 链长=S/2+K, S=行程距离, K=π·R+“安全量”
Pitch=33.3mm, link per meter=30, length of chain=S/2+K, S=stroke, K=π·R+“safety ration”

| | | | | | | |
|---|-----|-----|-----|-----|-----|-----|
| R | 38 | 48 | 75 | 100 | 125 | 150 |
| H | 104 | 124 | 178 | 228 | 278 | 328 |
| D | 85 | 95 | 122 | 147 | 172 | 197 |
| K | 200 | 233 | 333 | 400 | 466 | 566 |

安装实际高度:H_f=H+28mm(负载 0.5kg/m)

Actual mounting height:H_f=H+28mm(load 0.5kg/m)

示意图 Drawing

| 拖链型号 Cable Chain No. | 内高 Hi | 内宽 Bi | 外高 Ha | 外宽 Ba | 款式 Styles | 弯曲半径 Bending radius R | 固定接头类型及参数 Bracket type and parameters | | | | | | 接头代号 Bracket No. | | |
|----------------------------|----------|----------|----------|----------|--------------|--------------------------------|---------------------------------------|---------------------------|----------------------|---|----|----|---------------------|------|-----------------|
| | | | | | | | 可配接头类型 Applicable bracket type | 孔径 Bore diameter Φ1 | 孔距 (mm)hole distance | | | | | | |
| JN21Q.2.38N | 21 | 38 | 28 | 51.5 | Q.N | 38 48 75 100 125 150 | X ₂ | 6.4 | A | B | C | D | E | F | JN21Q.2.38N-XJT |
| JN21Q.2.68N | 21 | 68 | 28 | 81.5 | Q.N | | | | | | 54 | 32 | | 11.5 | |

单位 (unit): mm

注: N 表示内侧打开, X 表示: 斜型接头, 不同序号表示安装孔的不同排列样式

Note: N indicates that the interior opening, X: oblique bracket, Different serial number indicates the difference rank type of fixing holes

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

X₂ 型接头 X₂ type bracket

订货示例 Order Example

示例 拖链内高 21mm、内宽 38mm、半径 38mm、长度 1 米 /30 节 (Sample: inner height 18mm, inner width 18mm, radius 38mm, length 30 links/1 meter)

拖链 Chain JN21Q.2.38N R38 1000mm /30 Links (实际长度 Physical length: ±2mm)

接头 Bracket JN21Q.2.38N-XJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)