


◎ 适用于直径 60 毫米以下线缆 Suitable for 60mm or less of cable.

主要技术参数 Basic technical data

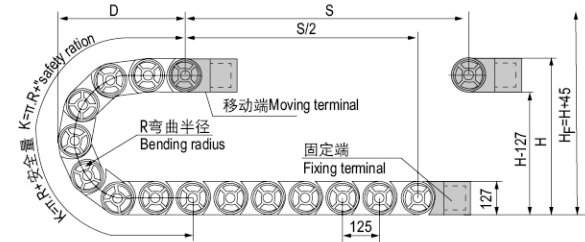


节距=125mm, 每米节数=8, 链长=S/2+K, S=行程距离, K=π.R+"安全量"
Pitch=125mm, link per meter=8, length of chain=S/2+K, S=stroke. K=π.R+"safety ration"

R	175	200	250	300	350	400	500
H	477	527	627	727	827	927	1127
D	364	389	439	489	539	589	689
K	875	1000	1125	1250	1375	1625	1875

安装实际高度:H_f=H+45mm(负载 2.2kg/m)

Actual mounting height:H_f=H+45mm(load 2.2kg/m)

示意图 Drawing

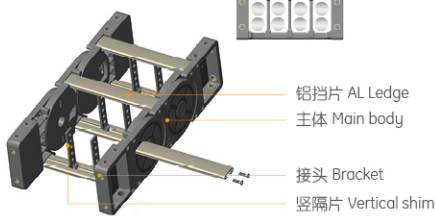

JN65Q.1.S-SGP
竖隔片
Vertical Shim

铝挡片 AL Ledge

主体 Main body

接头 Bracket

竖隔片 Vertical shim


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.
JN100Q.1.100W	100	100	127	160	Q.W	175,200,250, 300,350,400, 500	F-Q	9	35	128	153	66	20	160	JN100Q.1.100W-FJT
JN100Q.1.125W	100	125	127	185	Q.W		F-Q	9	35	153	153	66	20	185	JN100Q.1.125W-FJT
JN100Q.1.150W	100	150	127	210	Q.W		F-Q	9	35	178	153	66	20	210	JN100Q.1.150W-FJT
JN100Q.1.200W	100	200	127	260	Q.W		F-Q	9	35	228	153	66	20	260	JN100Q.1.200W-FJT
JN100Q.1.250W	100	250	127	310	Q.W		F-Q	9	35	278	153	66	20	310	JN100Q.1.250W-FJT
JN100Q.1.300W	100	300	127	360	Q.W		F-Q	9	35	328	153	66	20	360	JN100Q.1.300W-FJT
JN100Q.1.350W	100	350	127	410	Q.W		F-Q	9	35	378	153	66	20	410	JN100Q.1.350W-FJT
JN100Q.1.400W	100	400	127	460	Q.W		F-Q	9	35	428	153	66	20	460	JN100Q.1.400W-FJT
JN100Q.1.500W	100	500	127	560	Q.W		F-Q	9	35	528	153	66	20	560	JN100Q.1.500W-FJT
JN100Q.1.600W	100	600	127	660	Q.W		F-Q	9	35	628	153	66	20	660	JN100Q.1.600W-FJT

单位 (unit): mm

注: Q.W 表示桥式外侧开, F-Q 表示: 桥式方型接头, 不同序号表示安装孔的不同排列样式

Note: Q.W Bridge type exterior opening, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

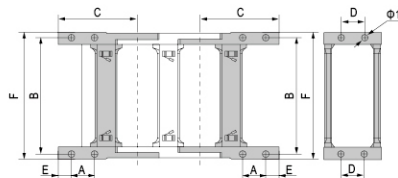

F-Q 型接头 F-Q type bracket

订货示例 Order Example

示例 拖链内高 100mm、内宽 100mm、半径 175mm、长度 1 米 / 8 节 (Sample: inner height 100mm, inner width 100mm, radius 175mm, length 8 links/1 meter)

拖链 chain JN100Q.1.100W R175 1000mm / 8 Links (实际长度 Physical length: ±2mm)

接头 Connector JN100Q.1.100W-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)